

### **Ornamental Low Voltage Post Cap Light**



STANDARD COLORS













Draws 0.80 Watts, Available in 3000 & 5000 Kelvin 2"-4" 35 Lumens & 4.25" -5.5" 50 Lumens.

\*Requires a LMT DC LED Low Voltage Power Supply and Harness.


SIZES OFFERED I 2", 2.5", 3", 3.25", 3.5", 4", 4.25", 4.5", 5", 5.5"

Ornamental Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 22 Lumens. Haven Scalloped Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 22 Lumens. Haven Halo Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 22 Lumens. Haven Downward Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 36 Lumens.

\* Requires a LMT DC LED Low Voltage Power Supply and Harness.




Ornamental Halo Low Voltage Post Cap Light





Ornamental Scalloped Low Voltage Post Cap Light Ornamental Downward Low Voltage Post Cap Light



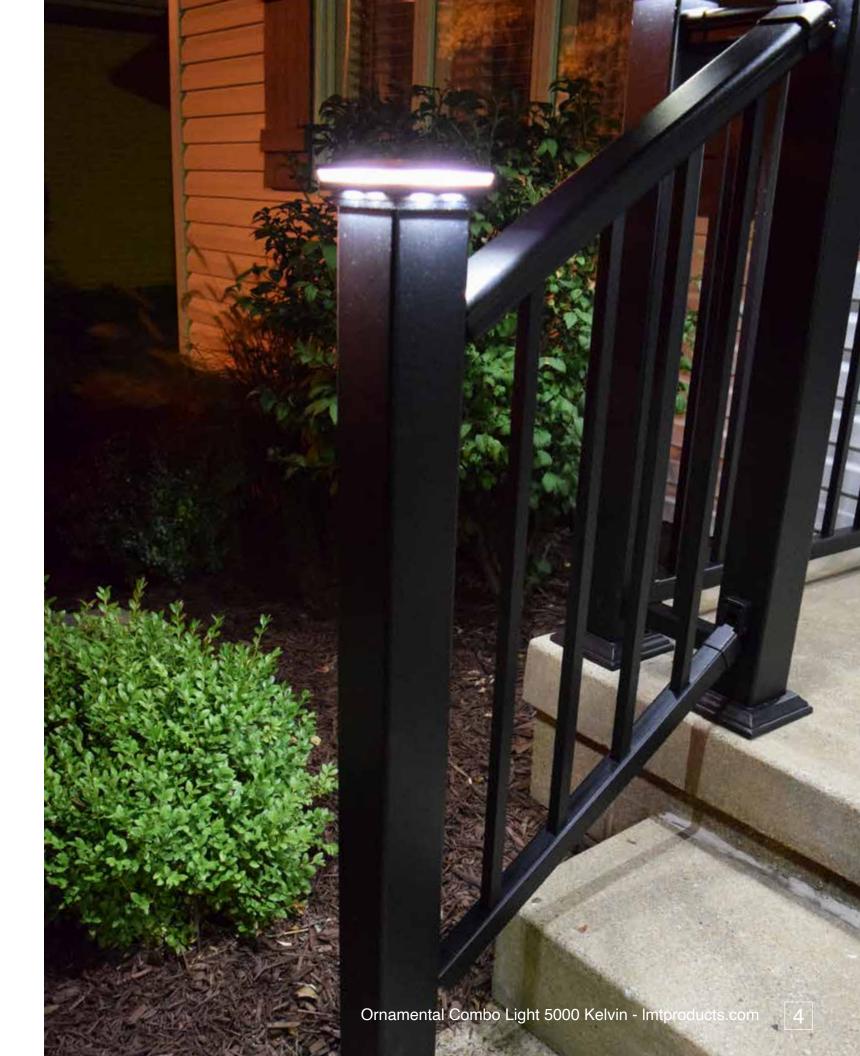






Our Haven line is offered in sizes from 3-5/8" through 6" and in four low voltage configurations. There are three lens choices and a downward version all offered in multiple color options.

# Haven Low Voltage Post Cap





STANDARD COLORS
DESIGNER FINISHES



SIZES OFFERED | 3-5/8", 4", 4-1/2", 5", 5-5/8", 6"

Haven Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 22 Lumens. Haven Scalloped Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 22 Lumens. Haven Halo Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 22 Lumens. Haven Downward Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 36 Lumens.

\* Requires a LMT DC LED Low Voltage Power Supply and Harness.



Haven Halo Low Voltage Post Cap Light




Haven Scalloped Low Voltage Post Cap Light



Haven Downward Low Voltage Post Cap Light



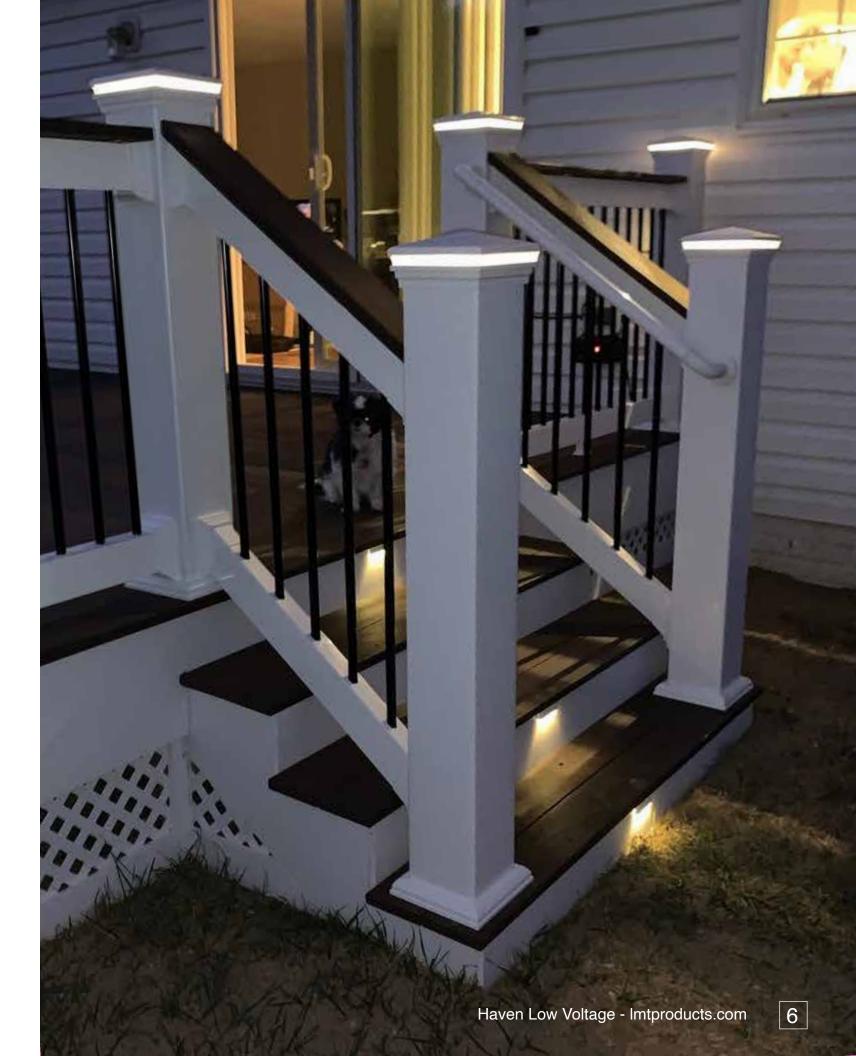





Our Cape May line is offered in sizes from 3-5/8" through 6" and in four low voltage configurations and five solar versions. There are three lens choices and a downward version in low voltage and two solar lens choices all offered in multiple color options.

# Cape May Low Voltage Post Cap Light The Designer Finish

The Designer Finishes products allows for personal customizing of the post caps using accent colors and textured finishes. There are five Designer colors with textured finishes and four standard colors giving you numerous options to choose from.



STANDARD COLORS
DESIGNER FINISHES



SIZES OFFERED | 3-5/8", 4", 4-1/2", 5", 5-5/8", 6"

Cape May Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 22 Lumens.

Cape May Scalloped Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 22 Lumens.

Cape May Halo Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 22 Lumens.

Cape May Downward Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 36 Lumens.

\* Requires a LMT DC LED Low Voltage Power Supply and Harness



Cape May Halo Low Voltage Post Cap Light




Cape May Downward Low Voltage
Post Cap Light



Cape May Scalloped Low Voltage Post Cap Light



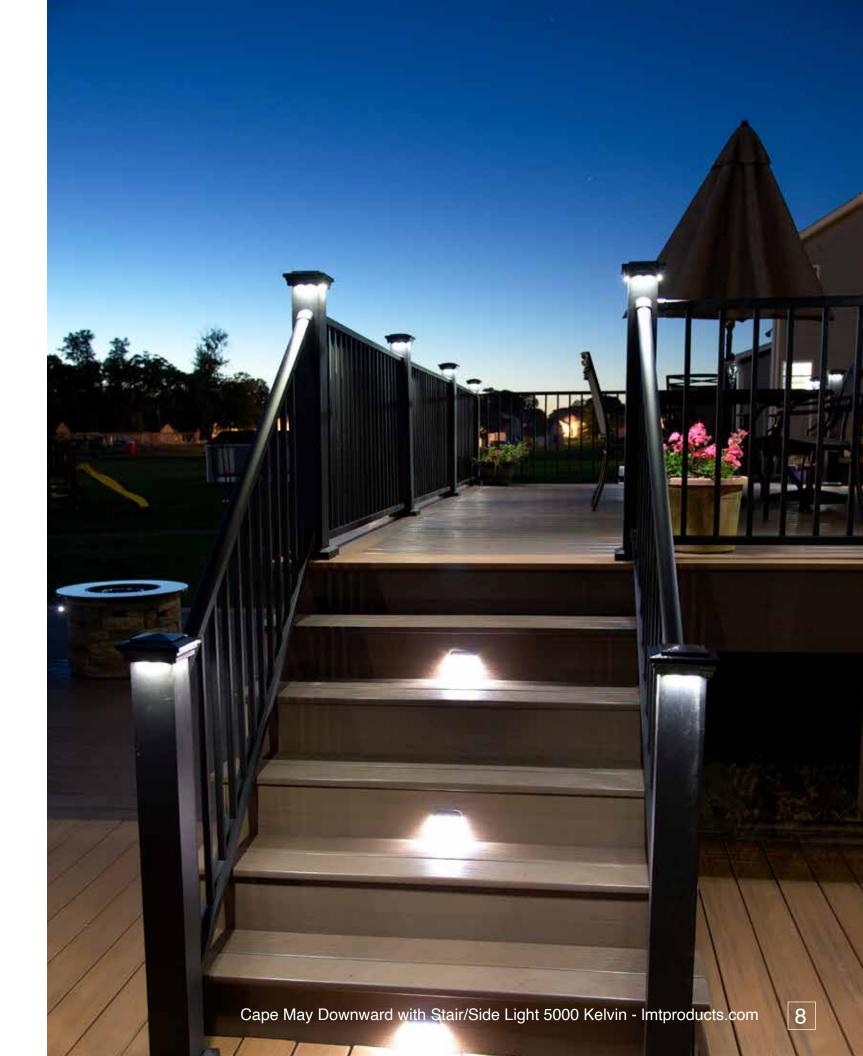





Our Neptune line is offered in sizes from 3-5/8" through 6" and in four low voltage configurations and five solar versions. There are three lens choices and a downward version in low voltage and two solar lens choices all offered in multiple color options.

Neptune Low Voltage

**Post Cap Light** 

The Designer Finishes products allows for personal customizing of the post caps using accent colors and textured finishes. There are five Designer colors with textured finishes and four standard colors giving you numerous options to choose from.



SIZES OFFERED | 3-5/8", 4", 4-1/2", 5", 5-5/8", 6"

Neptune Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin, 22 Lumens.

Neptune Scalloped Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000 Kelvin,
22 Lumens. Neptune Halo Low Voltage: Draws 0.80 Watts, Available in 3000 & 5000

Kelvin, 22 Lumens. Neptune Downward Low Voltage: Draws 0.80 Watts, Available in
3000 & 5000 Kelvin, 36 Lumens.

\* Requires a LMT DC LED Low Voltage Power Supply and Harness.



Neptune Halo Low Voltage Post Cap Light




Neptune Downward Low Voltage
Post Cap Light



Neptune Scalloped Low Voltage
Post Cap Light



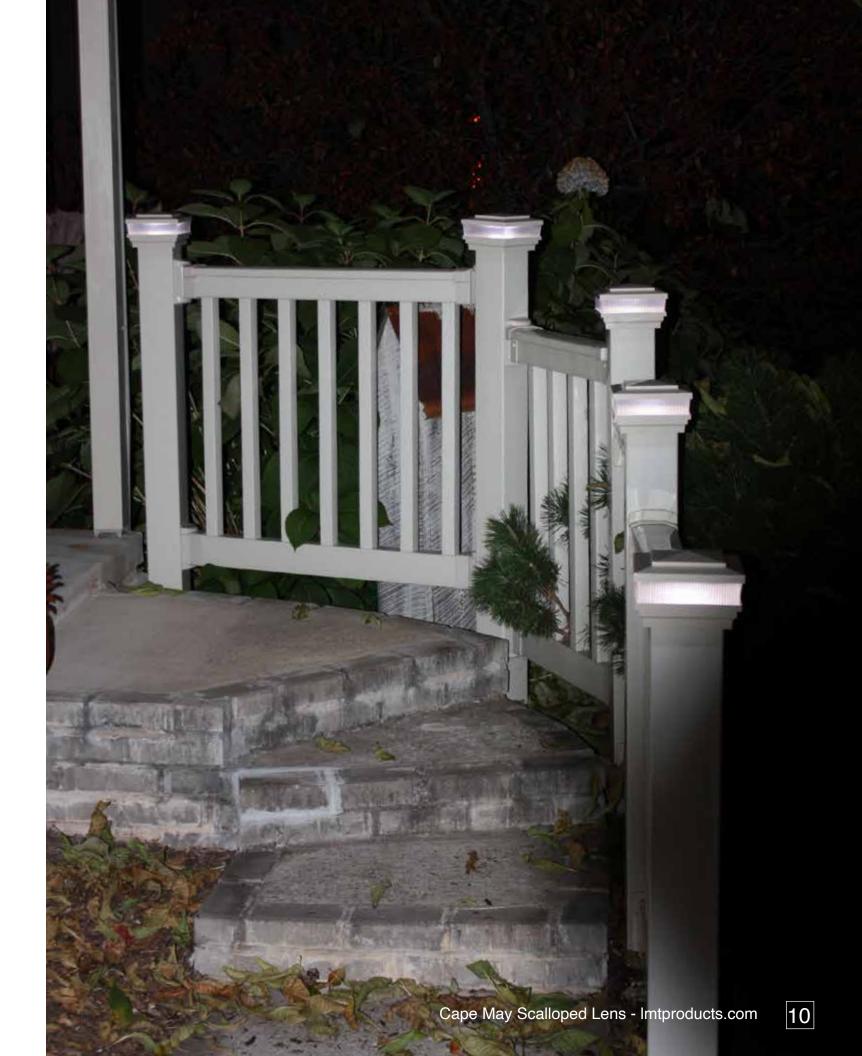





Our popular Solar Galaxy is now available in Low Voltage. Has a large prismatic lens creating dramatic widening effect of abundant light . Comes with a removal adapter that will accommodate 4" Sq. or 5" Sq. posts.


# Low Voltage Galaxy Post Cap Light



STANDARD COLORS



Fits externally over 4" Sq." or 5" Sq. post, 4 ea. LED lights, includes adapter for use with 4" posts, 24 Lumens, Draws 0.8 Watt. Overall Dimensions: Height 5"x 6"Wide, Lens Reveal 2.75" Tall x 5" Wide, 5.5" Lead Wire w/ Female 0.5 Diameter End Connector and Requires a LMT DC low voltage Power Supply

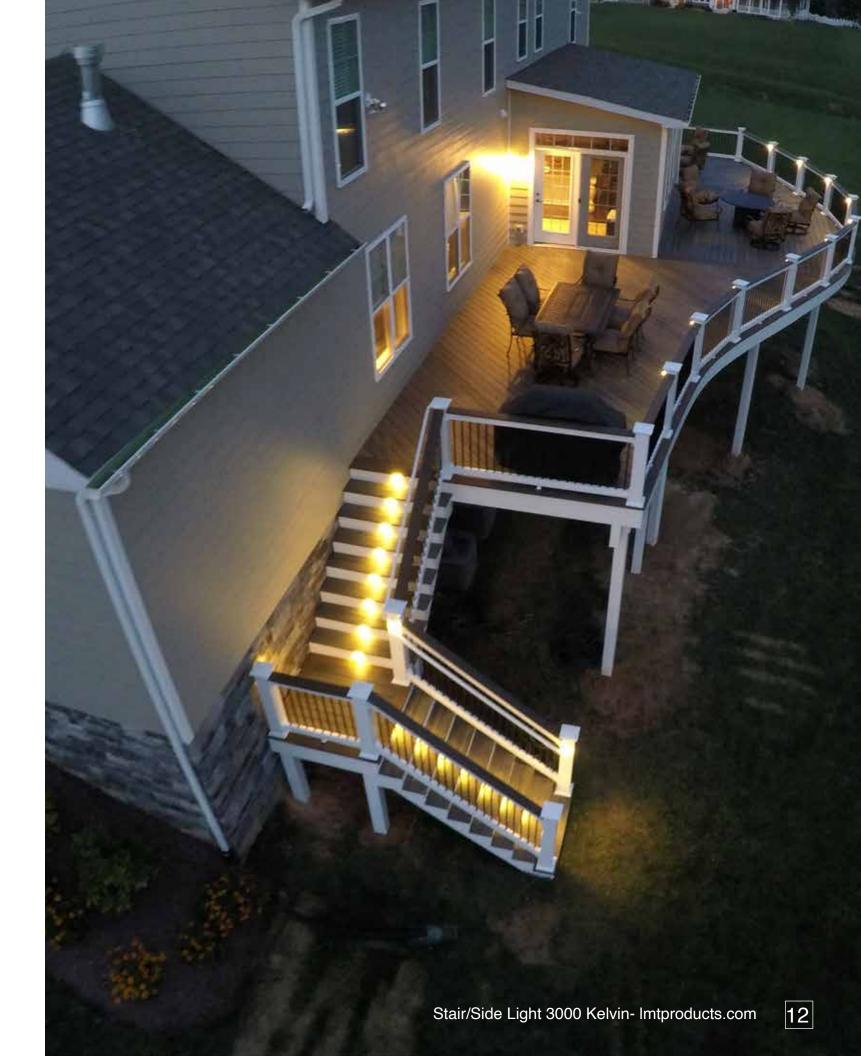







Our accent lights are a perfect compliment to stair, under rail or flush deck lighting. These products offer improved safety and visibility, as well as look great in any outdoor living space. Our numerous color options ensure a great match to our other lighting lines.

# Low Voltage Scalloped Dome Side Light & Dome Side Light



<sup>\*</sup> Requires a LMT DC LED Low Voltage Power Supply and Harness.

## Flush Deck Light with Trim Ring



STANDARD COLORS



Product dimensions: Largest Diameter: 1.5", LED Diameter 1"; Overall Height (without wire): 0.8"; Hole Size Required 1.250", Package contents: (1) LED Light with Trim Ring, Wattage: 0.4 W, Lumens: 7, Wire lead length: 9" wire lead with connector

<sup>\*</sup> Requires a LMT DC LED Low Voltage Power Supply and Harness.











Our accent lights are a perfect compliment to stair, under rail or flush deck lighting. These products offer improved safety and visibility, as well as look great in any outdoor living space. Our numerous color options ensure a great match to our other lighting lines.

# Flush Deck Light



STANDARD COLORS

Flush Mount Accent Light, Diameter: 0.995", Depth: 0.685", Contains: (1) ea. LED w/9" wire lead, End Connector: 0.5" Diameter, Draws 0.40 Watts, Available in 3000 & 5000 Kelvin, 7 Lumens

\* Requires a LMT DC LED Low Voltage Power Supply and Harness

# Flush Mount Trim Ring only 10pk



STANDARD COLORS



Product dimensions: Largest Diameter: 1.5", LED Diameter 1"; Overall Height: 0.8"; Hole Size Required 1.250", Package contents: (10) Trim Ring. For use with SKU# 1600

# **Recessed Riser Light**




STANDARD COLORS



Product dimensions: Largest Diameter: 1", LED Diameter 0.9"; Overall Height (without wire): 1.1"; Hole Size Required 0.750", Package contents: (1) LED Light with Trim Ring, Wattage: 0.4 W, Lumens: 12

\* Requires a LMT DC LED Low Voltage Power Supply and Harness.



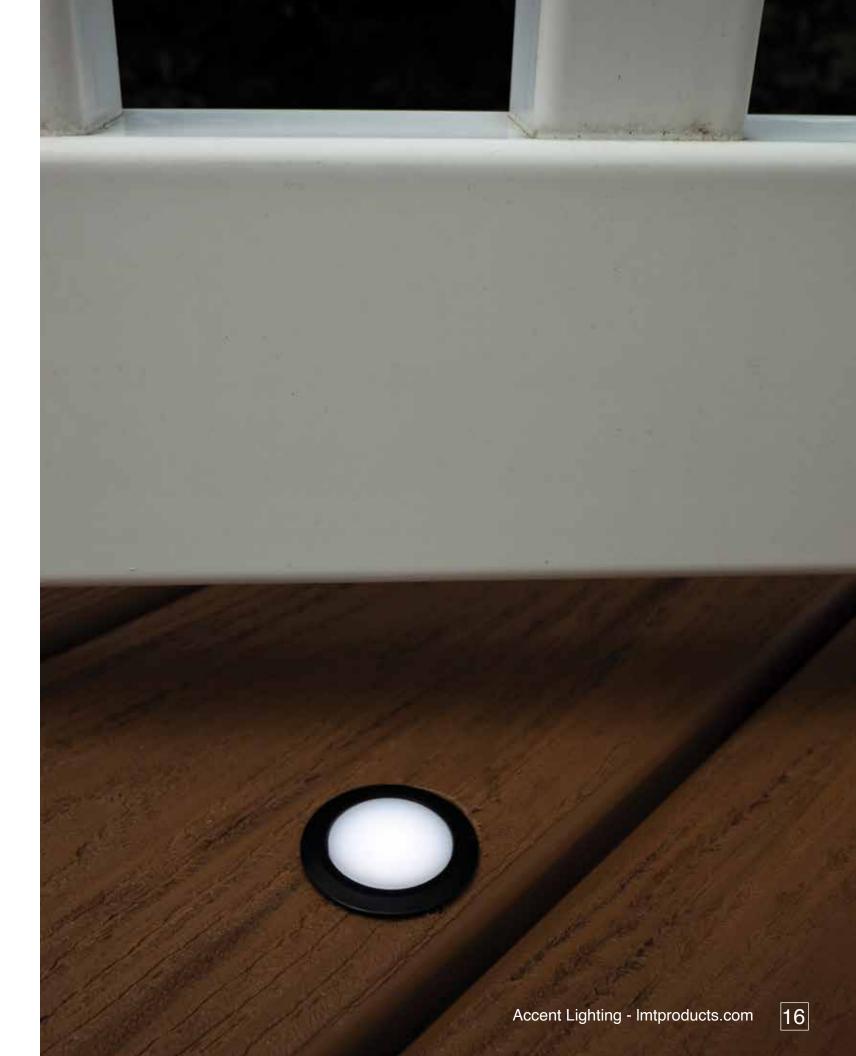






Our accent lights are a perfect compliment to stair, under rail or flush deck lighting. These products offer improved safety and visibility, as well as look great in any outdoor living space. Our numerous color options ensure a great match to our other lighting lines.

### **Ornamental Low Voltage Side Light**

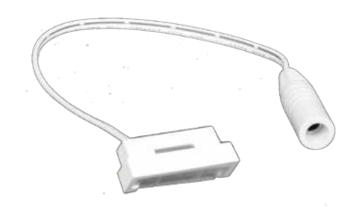

STANDARD COLORS



Dimensions: 1.50" x 0.63" x 0.39", 10" wire lead, End Connector: 0.5" Diameter, Contains: Fixture & (2ea.) Screws. Draws 0.40 Watt, Available in 3000 & 5000 Kelvin, 25 Lumens

\* Requires a LMT DC LED Low Voltage Power Supply and Harness.

### Low Voltage Stair/Side Light with 2 covers




STANDARD COLORS DESIGNER FINISHES



Oval dimensions: 1.130" x 3.223", Contains: (1) ea. Lens w/ (3) ea. LED, (1) ea. Half Cover, (1) ea. Full Cover, & (2) ea. Screws, w/ 9" lead wire. End Connector: 0.5" Diameter for use on Stair and side post applications, Draws 0.40 Watts, Available in 3000 & 5000 Kelvin, 12 Lumens

<sup>\*</sup> Requires a LMT DC LED Low Voltage Power Supply and Harness.



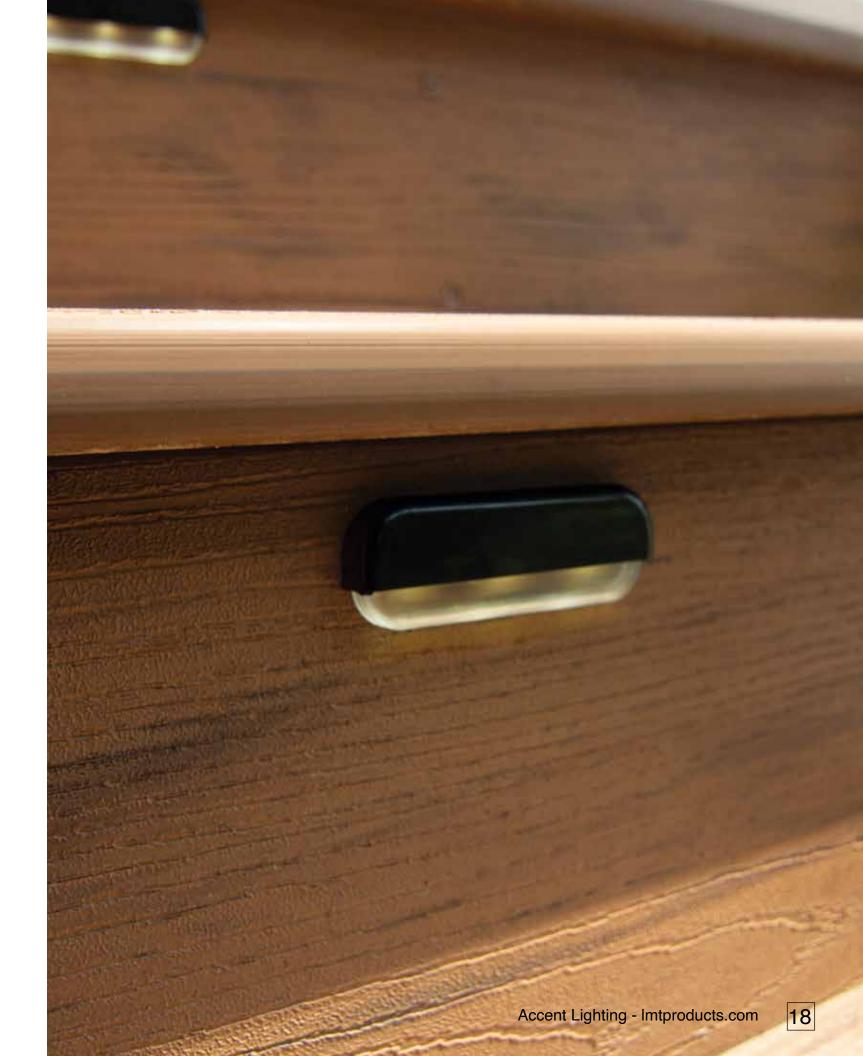





Our accent lights are a perfect compliment to stair, under rail or flush deck lighting. These products offer improved safety and visibility, as well as look great in any outdoor living space. Our numerous color options ensure a great match to our other lighting lines.

#### 3" Under Rail Light



STANDARD COLORS









Dimensions: 2.97" x 0.52" x 0.35", Diameter, 10" wire lead, End Connector: 0.5" Diameter, Contains: Fixture & (2ea.) Screws. Draws 0.40 Watt, Available in 3000 & 5000 Kelvin, 10 Lumens

\* Requires a LMT DC LED Low Voltage Power Supply and Harness.

### 92" Low Voltage LED **Under Rail Strip Light w/o Channel**



92" Under Rail Strip Light Low Voltage, Dimensions: L: 92" x W: 0.20" x D: 0.10", Connector: 0.5" Diameter, 10" wire lead, Draws 3.0 Watts, Available in 3000 & 5000 Kelvin, 260 Lumens, 138 ea. LED, is cuttable every 2".

\* Requires a LMT DC LED Low Voltage Power Supply and Harness.


# **Bistro String Light**



Dimensions: 8 ea. Shatter Resitant Led Bulbs spaced every 3', L: 24' x D: 1.8" x H: 9.0", Connector: 0.5" Diameter, Draws 6.4 Watts, Available in 3000 & 5000 Kelvin, 400 Lumens.

\* Requires a LMT DC LED Low Voltage Power Supply and Harness.



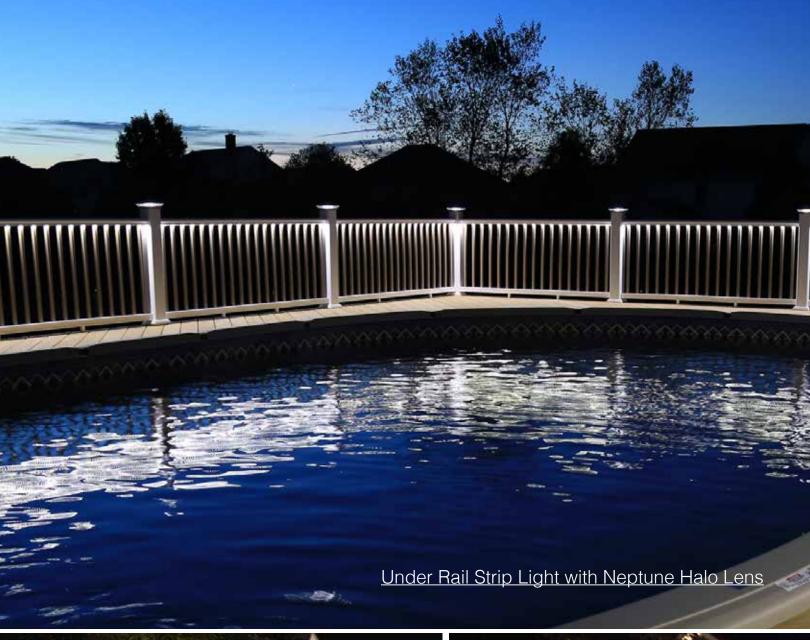





Accent Lighting - Imtproducts.com





Wiring & Accessories

LMT produces a wide selection of wiring products to make installation quick and easy. Multiple harness lengths and various splitters, allows for simple "plug and play" with no cutting or splicing. We also offer transformers in both 12 and 50 watt configurations that are perfectly matched to power the number of lights in your installation with optional dimmers and remotes.

# 50 Watt LED Low Voltage

Smart Power Supply w/photo eye, timer, and Smart Connectivity



50 Watt, 12 Volt DC, 4.2 Amps Programmable Smart Power Supply compatible with Amazon Alexa and Google Home. 4' output wire lead with molded Tee connector, and 5' wired remote photocell. Built in "Smart Phone Connectivity" controls, LED dimmer, timer (1-8 hours or dusk to dawn), teachable photo eye, and diagnostic troubleshooting modes. Android and IPhone apps available. Add up the total wattage of all the bulbs you will be using. This will give you an estimate of which size lighting transformer you will need. Will power approximately a maximum of 65 each (0.8 Watts) lights.

# 12 Volt/12 Watt Power Supply w/ Photo Eye




12 Watt, 12 Volt DC, 1 AMPs with 9' wire lead with female connector and a TEE connector. Add up the total wattage of all the bulbs you will be using. This will give you an estimate of which size lighting transformer you will need. Will power approximately a maximum of 16 each (0.8 Watts) lights.

# Dimmer for 12 Watt LED Low Voltage Power Supply w/ Remote



For Use With 12 Volt / 12 Watt Power Supply, Installed Between Transformer and Photo Eye. Includes Remote Control.

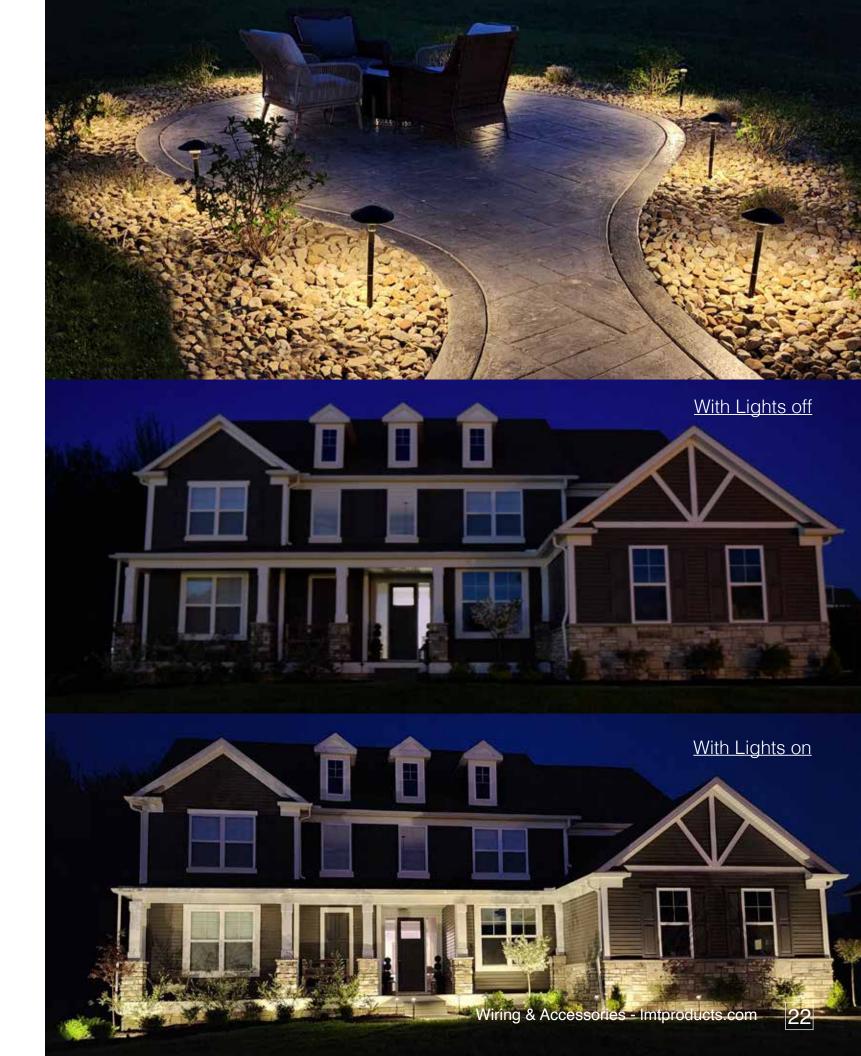





LMT produces a wide selection of wiring products to make installation quick and easy. With multiple harness lengths and various splitters, allows for simple "plug and play" with no cutting or splicing. We also offer transformers in both 12 and 50 watt configurations that are perfectly matched to power the number of lights in your installation with optional dimmers and remotes.

### 2 Output Splitter Low Voltage LED



For Connection From Male Plug To Light, Splitter, Or Harness. Total Length: 7.5", 1 Female and 2 Male Connectors: 0.50" Diameter

## 5 Output Splitter Low Voltage LED




For Connection From Male Plug To Light, Splitter, Or Harness. Total Length: 7.5", 1 Female and 5 Male Connectors: 0.50" Diameter: 2 Caps For Unused Outputs

### Low Voltage LED Harness



For Connection From Male Plug To Light, Splitter, Or Harness., Female and Male Connector: 0.50" Diameter.

SIZES OFFERED | 2', 5', 7', 9'

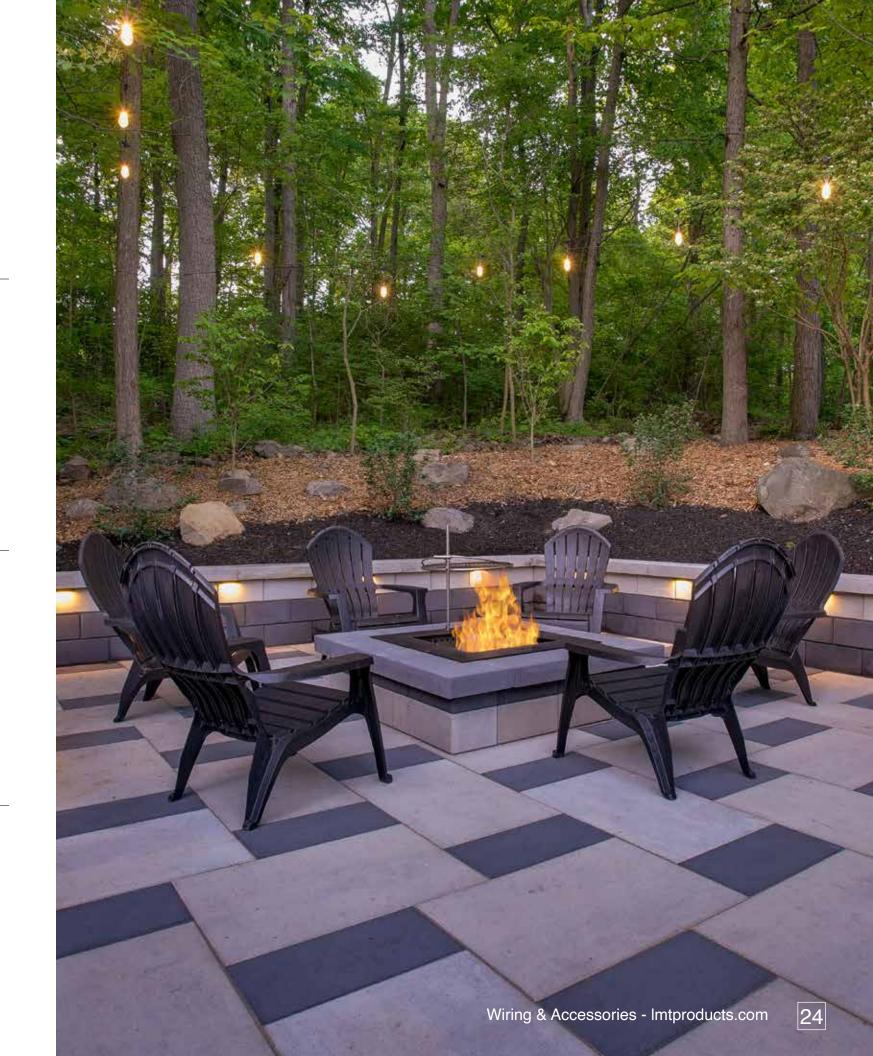





# **Spot Light**



Spot Light Includes: (1) ea. Spot Light w/ 40" Length Lead wire with a 0.5" Female End Connector and U Stake with tension thumb screws, Dimensions: Length 2.85" x Width 3.5" x Height 8.25, Light Tilt Range 65 Degrees up or down, Total Height 8.25", Height Installed 2.5", Draws 1 Watt, Lumens 65, \*Requires a LMT DC LED Low Voltage Power Supply



# **Landscape LED Harness**



48", 96" & 144" Landscape Harness (1) ea. 0.5" Diameter Female End with (3) Male End Tee 18 AWG, Can be buried up to 6" depth









# Path Light w/ 4" & 7" Shade Reflector



Path Light Includes: (2) ea. 8" Extensions, (1) ea. 6.5" Stake, (1) ea. Extension Joiner Ring, (1) ea. Installation Tool Tamp, (1) ea. 7"

Diameter Shade Reflector, (1) ea. 4" Shade Reflector (1) ea. 4" Diameter Path Light w/ Trim Ring with a 24" Length Lead wire 0.5" Female end connector. Dimensions: Top Light 4.6" Diameter, Total Height 27", Installed height 20.5". 25 Lumens, Draws 1 Watt. \*Requires a LMT DC LED Low Voltage Power Supply

## **Adjustable Angle Hardscape Light**



Adjustable Hardscape Light Dimension: Length 3.4", Width 5.75",
Height 0.85" Two mounting options included: Bracket(s) for placement
between blocks (screws for back wall not included) or Surface Mount
Bracket w/screws. Draws 1 Watt, Output Lumens 53, Wire Length 42" w/
0.5" Female End Connector \*Requires a LMT LED Low Voltage Power
Supply

# **Low Voltage LED Harness**



For Connection From Male Plug To Light, Splitter, Or Harness. Total Length: 144" or 300", Female and Male Connector: 0.50" Diameter 16 AWG, Can be buried up to 6" depth







Our ornamental product line is the perfect accent to your property's deck and fencing. Offered in both low voltage and solar allows flexibility in installation and a variety of applications. With cap sizes from 2" through 5.5", our ornamental line is suited for most post sizes and our accent lights are ideal for stairs and discreet accent lighting on decks.

### **Ornamental Solar Light Post Cap**



STANDARD COLORS






Available in 5000 Kelvin, 3 Lumens (US Patent # 6,722,637)


SIZES OFFERED I 2", 2.5", 3", 3.5", 4"



Ornamental Solar Post Cap with Accessory Connection



Ornamental Downward Low Voltage Post Cap Light



Ornamental Solar Light Cap Light











Our Cape May line is offered in sizes from 3-5/8" through 6" and in four low voltage configurations and five solar versions. There are three lens choices and a downward version in low voltage and two solar lens choices all offered in multiple color options.

# **Cape May Solar**

The Designer Finishes products allows for personal customizing of the post caps using accent colors and textured finishes. There are five Designer colors with textured finishes and four standard colors giving you numerous options to choose from. The Neptune, Cape May and Haven post caps can have different top and lower base (skirt).



STANDARD COLORS

DESIGNER FINISHES



Cape May Solar: Available in 5000 Kelvin, 3 Lumens.

Cape May Scalloped Solar: Available in 5000 Kelvin, 3 Lumens.

Cape May Halo Solar: Available in 5000 Kelvin, 3 Lumens.

Cape May Downward: Available in 5000 Kelvin, 6 Lumens.

Cape May Accessory: Will power (2) ea.

Solar Post Cap I US Patent #6,722,637



Cape May Solar Post Cap with Accessory Connection



Cape May Scalloped Solar Post Cap Light



Cape May Downward Solar Post Cap Light



Cape May Solar Post Cap Light



Cape May Halo Solar Post Cap Light











Our Neptune line is offered in sizes from 3-5/8" through 6" and in four low voltage configurations and five solar versions. There are three lens choices and a downward version in low voltage and two solar lens choices all offered in multiple color options.

# **Neptune Solar**



The Designer Finishes products allows for personal customizing of the post caps using accent colors and textured finishes. There are five Designer colors with textured finishes and four standard colors giving you numerous options to choose from.

> STANDARD COLORS DESIGNER FINISHES








SIZES OFFERED | 3-5/8", 4", 4-1/2", 5", 5-5/8", 6"

Neptune Solar: Available in 5000 Kelvin, 3 Lumens. Neptune Scalloped Solar: Available in 5000 Kelvin, 3 Lumens. Neptune Halo Solar: Available in 5000 Kelvin, 3 Lumens. Neptune Downward: Available in 5000 Kelvin, 6 Lumens. Neptune Accessory Will power (2) ea. Solar Accessory Lights. \*Requires Accessory Lights and Harnesses - Sold separately. Available in 5000 Kelvin, 3 Lumens.

Solar Post Cap I US Patent #6,722,637



Neptune Solar Post Cap with Accessory Connection




Neptune Scalloped Solar Post Cap Light



Neptune Downward Solar Post Cap Light




Neptune Solar Post Cap Light



Neptune Halo Solar Post Cap Light



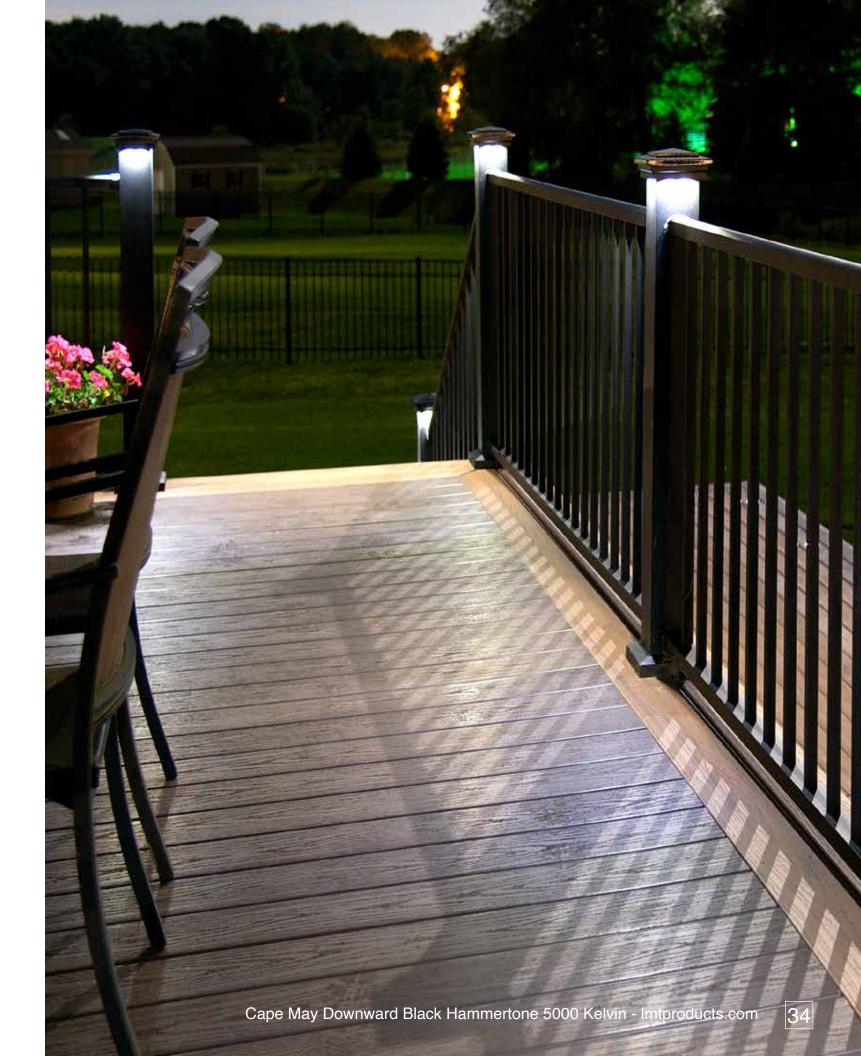





Our ornamental product line is the perfect accent to your property's deck and fencing. Offered in both low voltage and solar allows flexibility in installation and a variety of applications. With cap sizes from 2" through 5.5", our ornamental line is suited for most post sizes and our accent lights are ideal for stairs and discreet accent lighting on decks.

# **Solar Ornamental Side Light**



STANDARD COLORS



Dimensions: 1.50" x 0.63" x 0.39", 10" wire lead, End Connector: 0.375" Diameter, Contains: Fixture & (2ea.) Screws. 3 Lumens. Available in 5000 kelvin. (US Patent # 6,722,637)

\*Requires a Solar Accessory Connection Cap and Solar Harnesses.

# **Solar Recessed Riser Light**



STANDARD COLORS





Product dimensions: Largest Diameter: 1", LED Diameter 0.9"; Overall

Height 1.1"; Hole Size Required 0.750", Contains: (1) LED Light with Cover & 24" Lead Wire. End Connector: 0.375" Diameter. For use on Stair and side post applications, 5000 Kelvin, 3 Lumens \*Requires a Solar Accessory Connection Cap

### **Solar Harness**



Solar Harness for Connection From Female Plug to Light or Splitter, or Harness. Total Length: 24", Male and Female Connector: 0.375" Diameter.

SIZES OFFERED | 2'









Our accent lights are a perfect compliment to stair, under rail or flush deck lighting. These products offer improved safety and visibility, as well as look great in any outdoor living space. Our numerous color options ensure a great match to our other lighting lines.

# **Solar Stair/Side Light** with 2 covers



STANDARD COLORS
DESIGNER FINISHES



Oval dimensions: 1.130" x 3.223", Contains: (1) ea. Lens w/ (3) ea. LED, (1) ea. Half Cover (1) ea. Full Cover, & (2) ea. Screws, w/ 9" lead wire. End Connector: 0.5" Diameter for use on Stair and side post applications, Available in 5000 Kelvin, 3 Lumens. \*Requires a Solar Accessory Connection Cap and Solar Harnesses.

# Solar Scalloped Dome Side Light & Dome Side Light





STANDARD COLORS

DESIGNER FINISHES

Hammertone Black Gray Copper Gold Antique Brown

Diameter: 2.75", Height 1.344", (2) ea. LED w/ 24" lead wire. End Connector: 0.375". Diameter & (2) ea. screws, 5000 Kelvin , 6 Lumens \*Requires a Solar Accessory Connection Cap and Solar Harnesses.











### **Solar Horse Post Cap**

#### (Hidden Solar Panel) with Accessory Connection







STANDARD COLORS

White

SIZES OFFERED | 4", 5"

Maximum profile dimensions 4.050" Sq., Corner Radius 0.125", Extends 0.750" over the profile, Total Height: 1.75", End Connector: 0.375" Diameter

Maximum profile dimensions 5.050" Sq., Corner Radius 0.125", Extends 0.930" over the profile, Total Height: 1.75", End Connector: 0.375" Diameter


Can power up to 2 Solar Accessory Lights.

\* Requires Accessory Lights and Harness - Sold Separately.

#### **SOLAR POST CAP BATTERY – 4 PACK**




3.2V LiFePo4 14500 AA 600mAh Rechargeable Battery for Solar Lights

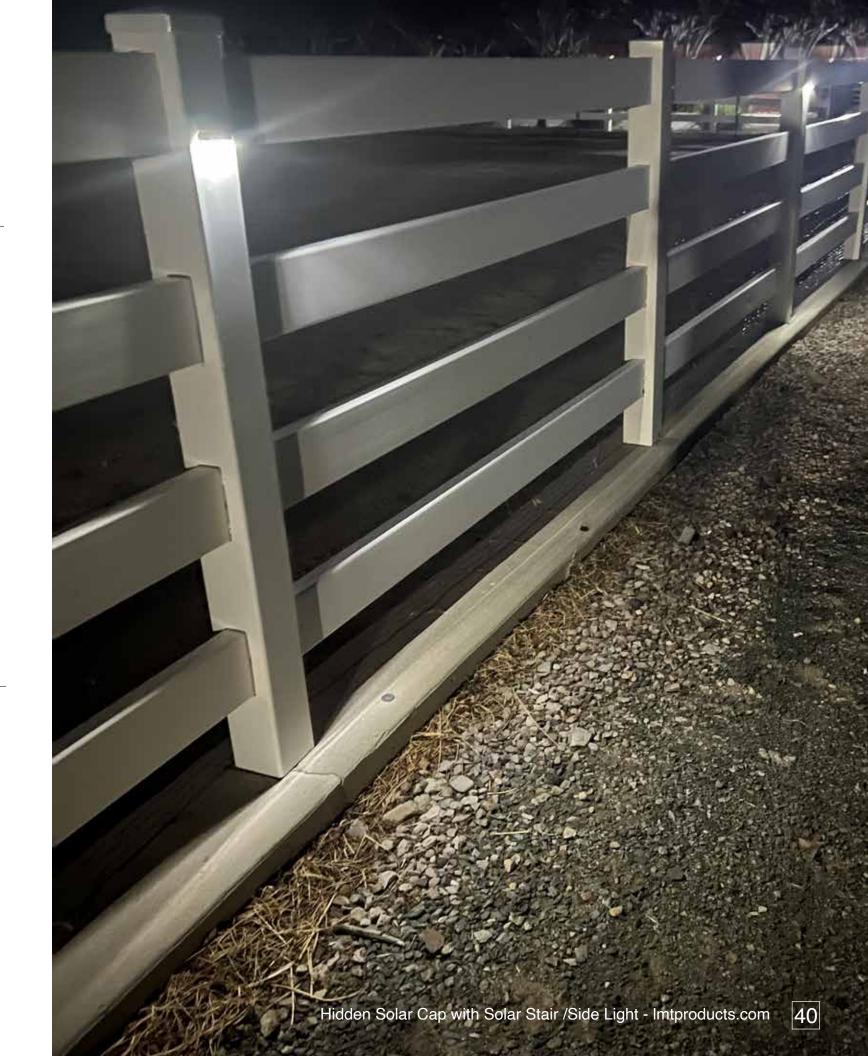





# Classic Solar Post Cap Light

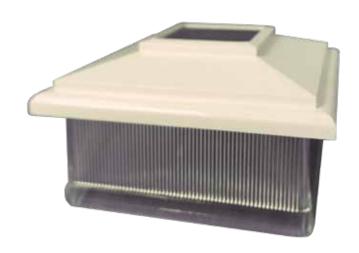

STANDARD COLORS

White

Available in 5000 Kelvin, 3 Lumens (US Patent # 6,722,637)

SIZES OFFERED | 5"

# **Cambridge Solar Post Cap Light**




STANDARD COLORS

White

Available in 5000 Kelvin, 3 Lumens (US Patent # 6,722,637)

SIZES OFFERED | 4", 5"



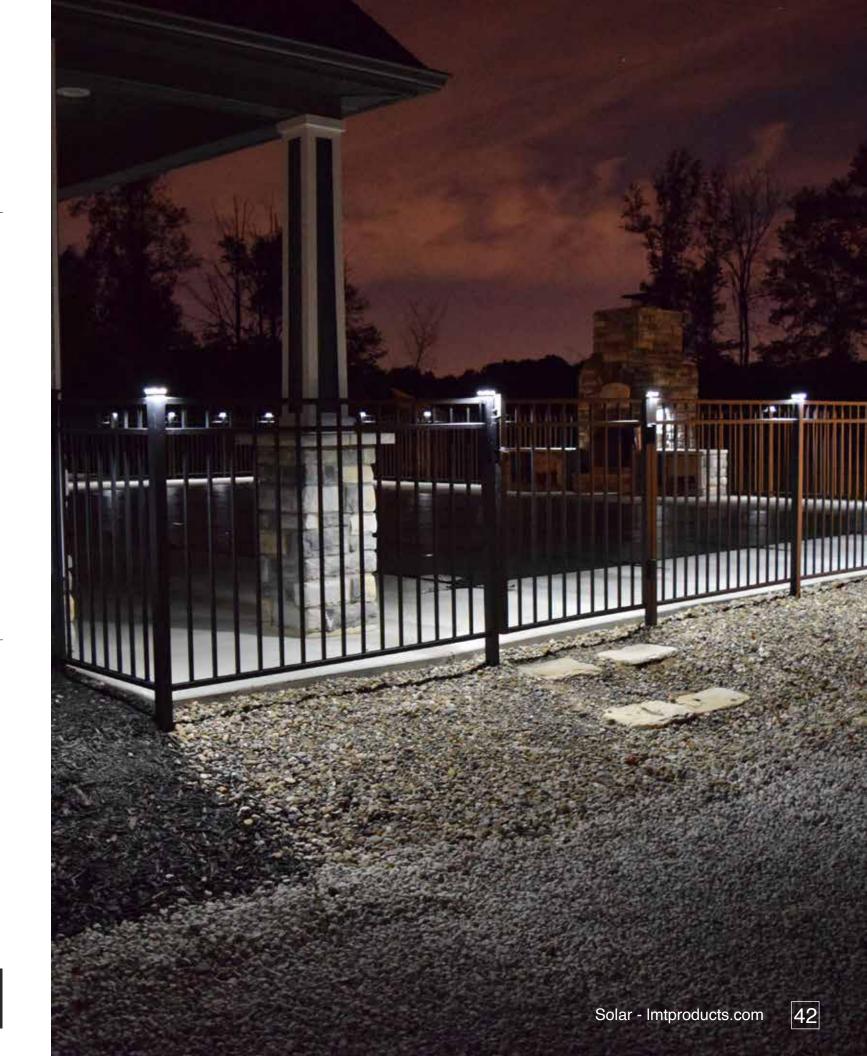





Our accent lights are a perfect compliment to stair, under rail or flush deck lighting. These products offer improved safety and visibility, as well as look great in any outdoor living space. Our numerous color options ensure a great match to our other lighting lines.

### **Galaxy Solar Post Cap Light**



STANDARD COLORS







Fits externally over 4" Sq." or 5" Sq. post, 4" Sq. solar panel, 1ea 3.2V LiFePo4 14500 AA 600mAh Rechargeable Battery for Solar Lights. Up to 12 hours of light, includes adapter for use with 4" posts, 9000 Kelvin, 3 Lumens. The brightest in lumens for solar light and with built adapter can work for a 4" or a 5" post. (US Patent # 6,722,637)

## **Ornamental Solar Wedge**



STANDARD COLORS







Extended Description: 1.25" x 1.95" x 4.8", 4 LEDs, (1)ea 3.2V LiFePo4 600mAh, 5000 Kelvin, 7 Lumens. (U.S. Patent #D553,783)









#### WHY LMT?

Our mission is to provide contractors and homeowners LED lighting solutions that are easy to install, reliable and affordable while offering unsurpassed customer service. Add safety, security, ambiance and increase enjoyment of your outdoor living space.

Unlike most manufacturers of lighting products, LMT has in house electrical engineers that engineer, design, test and add customer support on all lighting products. All LMT products are proudly designed and assembled in the USA.

#### Simple and Easy to Install

- No wires to cut plug together wiring harness
- Single power supply for all lights
- No need for an electrician or electrical permits

#### Long Lasting

- · Weather resistant connectors and lights
- Long-lasting LED's rated at 50,000 hours
- · Housings are durable and UV stable

#### Highly Energy Efficient

- Low Voltage DC Power Supply
- Dusk to Dawn light sensor
- Available with enabled Bluetooth<sup>®</sup> and Wi-Fi Connectivity with Smart Power 50 App on Android and Apple Devices







