

TRADITIONAL GAS FIREPLACES



WHY CHOOSE REGENCY?

At Regency, our past 40 years have been focused on providing a high-level of service while building high-quality and reliable products that our customers can enjoy for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do from when that very first stove rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's more than a fireplace!



TABLE OF CONTENTS

Regency Bellavista® Gas Fireplaces

B41XTCE, B41XTE 04 B36XTCE, B36XTE 06

Regency Panorama® Gas Fireplaces

P36, P36E, P36D, P36DE 08 P33, P33E, P33CE 10 P131E, P121E 12

Regency Excalibur® Gas Fireplace

P90E 14

Regency Liberty® Gas Fireplace

L965E 15

Design Choices & Options 16

Specifications 20





REGENCY BELLAVISTA® | B41XTCE · B41XTE Large Gas Fireplaces



B41XTE - Vignette Faceplate - Black



B41XTE - Vignette Faceplate - Tuscan Sunset



B41XTE - Vignette Faceplate - Platinum

EXPANSIVE VIEWING AREA

With its impressive viewing area and artistic fire presentation, the Bellavista® creates beautiful gathering spaces. The B41XTCE offers a flush face design for a frameless display, while the B41XTE offers a range of trim finishes to suit any style and environment.

EXCEPTIONAL FLAME

Platinum embers and finely detailed logs molded by artists from real wood create a truly authentic fire experience. With 42,500 BTUs of controllable heat, the Bellavista is an efficient direct vent fireplace perfect for medium to large living spaces.

SPECIFICATIONS (NATURAL GAS)*	B41XTCE	B41XTE
Input (BTU)	42,500	42,500
Turn down to (BTU)	30,000	30,000
Efficiency (steady state)	72.76%	72.76%
EnerGuide Rating (Canada only)	68.15%	68.15%

DIMENSIONS		
Viewing Area	840 sq. in.	840 sq. in.
Width	46-11/16"	41-11/16"
Height	44-1/4"	36-11/16"
Depth	26-3/16"	22-5/16"

^{*} For propane (LP) specs please see page 20. For detailed specifications please see pages 20-23.





B41XTE - Vignette Faceplate - Black Chrome



B41XTE - Vignette Faceplate - Black Vignette Door Inlay - Black



B41XTE - Vignette Faceplate - Black Vignette Door Inlay - Tuscan Sunset

- Natural gas or propane
- Safety screen
- o Ceramic glass
- Log set with embers
- o Fire grate
- o Flame height adjustment control
- Proflame I GTMF remote control
- o Electronic ignition with SureFire™ switch
- o Top or rear vent for versatile installations
- Limited lifetime warranty

OPTIONS

- Vignette surrounds in various colors**
- Vignette door inlays in various colors**
- Vignette finishing trim**
- Brick panels in a variety of colors and designs
- o Inner reflective panels in black enamel
- Flush panels & mesh guard**
- Ember upgrade kit
- Wall thermostat
- Variable speed blower
- Vertical or horizontal vent terminations
- AstroCap® venting system

**B41XTE only



REGENCY BELLAVISTA® | B36XTCE · B36XTE Medium Gas Fireplaces



B36XTE - Vignette Faceplate - Black



B36XTE - Vignette Faceplate - Tuscan Sunset



B36XTE - Flush panels

BEAUTIFUL FLAMES

Bellavista means beautiful view in Italian. This is a perfect description of the fire view offered by the most popular sized fireplaces in the Regency line up.

BOLD STYLE

The B36XTCE and B36XTE models feature a bold flame and log package behind a 652 sq.in. viewing area that provides up to 31,000 BTU's of comforting heat. Quality workmanship is evident in Bellavista's finishes, custom accessories and safety tested ceramic glass.

SPECIFICATIONS (NATURAL GAS)*	В36ХТСЕ	В36ХТЕ
Input (BTU)	31,000	31,000
Turn down to (BTU)	21,500	21,500
Efficiency (steady state)	70.56%	70.56%
EnerGuide Rating (Canada only)	65.90%	65.90%

DIMENSIONS		
Viewing Area	652 sq. in.	652 sq. in.
Width	40-5/8"	36"
Height	38-1/16"	35-1/4"
Depth	23-5/8"	20-7/16"

^{*} For propane (LP) specs please see page 20. For detailed specifications please see pages 20-23.





B36XTE - Vignette Faceplate - Black Chrome



B36XTE - Vignette Faceplate - Black Vignette Door Inlay - Tuscan Sunset



B36XTE - Vignette Faceplate - Black Vignette Door Inlay - Black

- Natural gas
- Safety screen
- o Ceramic glass
- Log set with embers
- Fire grate
- o Flame height adjustment control
- o Proflame I GTMF remote control
- Electronic ignition with SureFire™ switch
- o Top or rear vent for versatile installations
- Limited lifetime warranty

OPTIONS

- Vignette surrounds in various colors**
- Vignette door inlays in various colors**
- Vignette finishing trim**
- o Brick panels in a variety of colors and designs
- o Inner reflective panels in black enamel
- Ember upgrade kit**
- Flush panels & mesh guard**
- Variable speed blower
- Wall thermostat
- Propane conversion kit
- Vertical or horizontal vent terminations
- AstroCap® venting system

**B36XTE only



REGENCY PANORAMA® | P36 · P36E · P36D · P36DE



Black Louvers



Vignette Faceplate - Tuscan Sunset



Vignette Faceplate - Platinum

POPULAR SIZE

Our most popular fireplace size is available in both slim and deep box designs to deliver beautiful fire and efficient heat to most common family rooms, dens and bedrooms.

VERSATILE STYLE

With the versatile Panorama P36, you can turn a traditional fireplace into a dynamic part of your home decor. Customize with warm finishes, screen doors and decorative accents - make it your Regency, right down to the last detail.

SPECIFICATIONS (NATURAL GAS)*	P36	P36E	P36D	P36DE
Input (BTU)	30,000	29,500	30,000	30,000
Turn down to (BTU)	15,500	19,500	15,500	21,000
Efficiency (steady state)	70.55%	72.88%	71.26%	74.08%
EnerGuide Rating (Canada only)	62.36%	66.86%	63.89%	68.89%

DIMENSIONS				
Viewing Area	451 sq. in.	451 sq. in.	451 sq. in.	451 sq. in.
Width	36"	36"	36"	36"
Height	30-1/2"	30-1/2"	30-1/2"	30-1/2"
Depth	12-3/4"	12-3/4"	17-1/8"	17-1/8"

^{*} For propane (LP) specs please see page 20. For detailed specifications please see pages 20-23.





Vignette Faceplate - Black Vignette Door Inlay - Black



Vignette Faceplate - Black Vignette Door Inlay - Black Chrome



Vignette Faceplate - Black Vignette Door Inlay - Tuscan Sunset

- Natural gas
- Safety screen
- o Ceramic glass
- Log set with embers
- o Fire grate
- o Flame height adjustment control
- Proflame GTMF remote control
- Electronic ignition (P36E/P36DE)
- Direct spark ignition (P36/P36D)
- Limited lifetime warranty

- Vignette surrounds in various colors
- Vignette door inlays in various colors
- Vignette finishing trim
- Brick panels in a variety of colors and designs
- Inner reflective panels in black enamel
- o Ember upgrade kit
- Black louvers & mesh guard
- Variable speed blower
- Wall thermostat
- o Propane conversion kit
- o Vertical or horizontal vent terminations
- Heat Wave™ power duct kit
- Heat Release™ kit
- AstroCap® venting system
- o 3 sided finishing trim (when using black louvers)



REGENCY PANORAMA® | P33 · P33E · P33CE Small Gas Fireplaces



P33CE - Verona Surround - Stainless Steel



P33CE Verona Surround - Black Glass



Vignette Faceplate - Platinum

TRUE FLUSH FINISHING

True flush finishing provides an unobstructed view of the fire in Regency's Panorama™ P33CE gas fireplace. As a focal point in small to medium-sized spaces, the P33CE embodies the complete fireplace experience with an artist sculpted ceramic log set and glowing embers.

COMPACT DESIGN

Measuring just 12-3/4 inches in depth, the slim design of the P33 offers tall style in a compact size and all the features of the Panorama collection, with just the right amount of heat output.

SPECIFICATIONS (NATURAL GAS)*	P33	P33E	P33CE
Input (BTU)	20,000	20,000	20,000
Turn down to (BTU)	14,000	14,000	14,000
Efficiency (steady state)	72.57%	68.28%	68.28%
EnerGuide Rating (Canada only)	66.01%	66.49%	66.49%

DIMENSIONS			
Viewing Area	416 sq.in.	416 sq.in.	416 sq.in.
Width	33"	33"	34-9/16"
Height	29"	29"	29-1/4"
Depth	12-3/4"	12-3/4"	16"

^{*} For propane (LP) specs please see page 20. For detailed specifications please see pages 20-23.





P33 - Vignette Faceplate - Black Chrome



P33 - Vignette Faceplate - Black Vignette Door Inlay - Black Chrome



P33 - Vignette Faceplate - Black Vignette Door Inlay - Tuscan Sunset

- Natural gas
- Safety screen
- o Ceramic glass
- Log set with embers
- Fire grate
- Flame height adjustment control
- Proflame I GTMF remote control
- Direct spark ignition (P33)
- Electronic ignition with SureFire® switch (P33E/P33CE)
- o 45° flue for versatile installations
- o Limited lifetime warranty

- o Verona glass or metal surrounds in various colors (P33CE)
- Vignette surrounds in various colors (P33/P33E)
- Vignette door inlays in various colors (P33/P33E)
- Vignette finishing trim (P33/P33E)
- Black louvers (P33/P33E)
- o Brick panels in various colors and designs
- o Inner reflective panels in black enamel
- o Ember upgrade kit
- Wall thermostat
- Variable speed blower
- Vertical or horizontal vent terminations
- o Propane conversion kit
- Heat Wave™ power duct kit
- AstroCap® venting system
- 3 sided finishing trim (when using black louvers)



REGENCY PANORAMA® P121E • P131E 2-Sided & 3-Sided Fireplaces

ONE FIRE, TWO ROOMS

Enjoy the ambience of a Regency fire from two rooms at once with a see-through direct vent fireplace. The Panorama two and three sided gas fireplaces add a stylish transition between living spaces. The large glass viewing area maximizes the radiant heat output providing up to 40,000 BTUs of heat per hour.

SPECIFICATIONS (NATURAL GAS)*	P121	P131
Input (BTU)	38,500	38,500
Turn down to (BTU)	26,000	26,000
Efficiency (steady state)	68.27%	68.27%
EnerGuide Rating (Canada only)	62.23%	62.23%

DIMENSIONS		
Viewing Area	1,305 sq. in.	1,658 sq. in.
Width	43-1/2"	41-1/2"
Height	36"	36"
Depth	25"	25"

^{*} For propane (LP) specs please see page 20. For detailed specifications please see pages 20-23.





P131 with black louvers and safety screen



P121 with black louvers and safety screen



P131 with black grilles

- Natural Gas
- Safety screen
- Tempered glass
- Log set with embers
- o Fire grate
- o Old town red side brick panels
- o Black brick panel floor
- o Variable speed blower
- o Flame height adjustment control
- o Proflame II GTMF remote control
- o Electronic ignition
- o 45° flue for versatile installations
- Limited lifetime warranty

- Louvers or decorative grilles
- Finishing trim (P121 only)
- Ceramic glass for bathroom installations
- Ember upgrade kit
- Wall thermostat
- Vertical or horizontal vent terminations
- Propane conversion kit
- AstroCap® venting system



REGENCY EXCALIBUR® | P90E Gas Fireplace

TIMELESS ARCH DESIGN

The gentle arched design of this product provides the perfect backdrop for Regency's beautiful flames. Glowing embers and realistic split logs molded by an artist from real wood create the experience of an authentic looking wood burning fire.

SPECIFICATIONS (NATURAL GAS)*	P90
Input (BTU)	35,000
Turn down to (BTU)	23,500
Efficiency (steady state)	76.07%
EnerGuide Rating (Canada only)	71.36%

DIMENSIONS	
Viewing Area	455 sq. in.
Width	37"
Height	29-1/4"
Depth	19-1/4"

* For propane (LP) specs please see page 20. For detailed specifications please see pages 20-23.

FEATURES

- Natural gas
- Ceramic glass
- Log set with embers
- Fire grate
- Black brick panel floor
- Variable speed blower
- Proflame II GTMF remote control
- Electronic Ignition
- Flame height adjustment control
- o Limited lifetime warranty

- Arch surround in black with integrated safety screen
- Brick panels in various colors and designs
- Double door inlay
- Wall thermostat
- o Propane conversion kit
- Heat Wave™ power duct kit
- Heat Release™ kit
- o AstroCap® venting system
- Steel stud framing kit



REGENCY LIBERTY® | L965E Large Gas Fireplace

ELEGANT STYLE, CONTROLLABLE HEAT

Create an elegant focal point with Regency Liberty L965E, one of the largest viewing areas available in the Regency line. The L965E permits finishing materials to be installed right to the edge for a pure, unadorned appearance. The adjustable burner system enables the flame to be controlled for mood and comfort. Choose a roaring fire or a gentle glow all from the convenience of a hand-held remote control.

SPECIFICATIONS (NATURAL GAS)*	L965E
Input (BTU)	48,000
Turn down to (BTU)	16,000
Efficiency (steady state)	59.00%
EnerGuide Rating (Canada only)	57.70%

DIMENSIONS	
Viewing Area	965 sq. in.
Width	36-13/16"
Height	33-1/4"
Depth	24"

* For propane (LP) specs please see page 20. For detailed specifications please see pages 20-23.

FEATURES

- Natural gas
- Safety screen
- Ceramic glass
- Log set with embers
- Fire grate
- Accent lights
- Flame height adjustment control
- Proflame I GTMFS remote control
- Electronic ignition with SureFire™ switch
- o Two stage burner
- Limited lifetime warranty

- Brick panels in a variety of colors and designs
- Inner reflective panels in black enamel
- Propane conversion kit
- o Vertical or horizontal vent terminations
- Heat distribution kit
- AstroCap® venting system

DESIGN CHOICES

CLEAN FACE TRADITIONAL FIREPLACES









B41XTCE

L903

SURROUND OPTIONS

VERONA METAL SURROUNDS



133



FINISHES





VERONA GLASS SURROUNDS



Р33СЕ

FINISHES





INNER PANEL OPTIONS (NOT AVAILABLE ON ALL MODELS)



Herringbone - Rustic Brown



Standard - Rustic Brown



Standard - Old Town Red



Standard - Charcoal



Castlestone



Ledgestone



Black Enamel Panels



Ember upgrade package

VIGNETTE & LOUVERED TRADITIONAL FIREPLACES









P33/P33E

P36/P36E/P36D/P36DE

B36XTE B41XTE

VIGNETTE FACEPLATE OR LOUVERED OPTIONS


VIGNETTE FACEPLATES & DOOR INLAY





Vignette Faceplate





VIGNETTE FACEPLATES & INLAYS FINISHES









Platinum (Not available for inlays)

Tuscan Sunset

LOUVERS





Black Louvers Flush Panels (B36XTE/B41XTE only)

ACCESSORIES	- AT A GLANCE		B41XTCE	B41XTE	B36XTCE	В36ХТЕ	P90E	P36/ P36D	P36E/ P36DE	P33CE	P33E	P33	P131E	P121E	L9651
Clean front	an front Glass		✓	•	✓	•	•		•	✓			•	•	✓
		Black		*	•	*	•	*	*	•	*	*			
		Black Chrome		*	•	*	•	*	*	•	*	*			
	Vignette	Platinum	•	*	•	*	•	*	*	•	*	*			
		Tuscan Sunset	•	*	•	*	•	*	*	•	*	*			
Faceplates		Black	•	*	•	*	•	*	*	•	*	*			
	Vignette Door Inlay	Black Chrome	•	*	•	*	•	*	*	•	*	*			
	iiitay	Tuscan Sunset	•	*	•	*	•	*	*	•	*	*			
	Vignette Finishi	ng trim	•	*	•	*	•	*	*	•	*	*			
		Black		•	•	•	•		•	*					
	Metal	Stainless Steel		•	•	•	•		•	*					
Surrounds		Sunset Bronze		•	•	•	•		•	*					
		Pure Black		•	•	•	•		•	*			•		
	Glass	Chocolate			•	•				*					
Excalibur Arch	Surround	Black		•	•	•	*	•	•	•			•		
Surrounds	Door Inlay	Black			•	•	*		•	•					
	Louvers	Black			•	•	•	*	*	•	*	*	*	*	
Classic look	Flush panels	Black	•	*	•	*			•	•					
	Finishing Trim	Black		*	•	*	•	*	*	•	*	*		*	
		Standard - Rustic Brown	*	*	*	*	*	*	*	*	*	*			
		Standard - Old Town Red	*	*	*	*	*	*	*	*	*	*	✓	✓	*
	Bricks	Standard - Charcoal	*	*	•	•	•		•	•					
Inner panels		Herringbone - Rustic Brown			•	•	*	*	*	*	*	*			
		Castlestone	*	*	*	*	•		•	•					*
		Ledgestone	•	•	•	•	•		•	•					*
	Reflective	Black enamel	*	*	*	*	•	*	*	*	*	*			*
Safety Screen*			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Ember upgrade	package		*	*	*	*	*	*	*	*	*	*	*	*	
Blower (with fa	n speed controll	er)	*	*	*	*	✓	*	*	*	*	*	•		
	Programmable ⁻	Thermostat	*	*	*	*	*	*	*	*	*	*	*	*	
Controls	Proflame GTMF	Remote Control	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	Proflame GTMFS	S Remote Control	•	•	•	•	•		•	•					✓
	Direct vent		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	AstroCap® Vent	ing System	*	*	*	*	*	*	*	*	*	*	*	*	*
	Heat Wave™ Po	wer Duct System		•	•	•	*	*	*	*	*	*			
Venting	Heat Release™	Kit	•	•	•	•	*	*	*		•				
	Heat Distributio	on kit		•	•	•	•		•						*
	Power Vent Kit			•	•	•	•		•	•			•		*
Propane conve	rsion kit				*	*	*	*	*	*	*	*	*	*	*

[·] Not available

[✓] Standard

[★] Optional

^{*} Safety screen is included with unit or faceplate

REMOTES & THERMOSTATS



Proflame I GTMF Remote Control



Proflame II GTMF Remote Control




Programmable Thermostat

FEATURE	DESCRIPTION	PROFLAME GTMF	PROGRAMMABLE THERMOSTAT		
On/Off		✓	✓		
Child lock		✓	•		
LCD Backlit Screen		✓	✓		
Clock		•	✓		
Temperature display	°F / °C	✓	✓		
	one setting (all days)	✓	✓		
Themostat	5-day weekday & 2-day weekend	•	✓		
Smart thermostat*		✓	•		
Flame adjustment	(6 levels)	✓	•		
Fan control**	(6 levels)	✓	•		
Accent light (On/Off)*	**	✓	•		

^{*} Smart Thermostat - Rather than a thermostat that simply turns your fireplace on and off, the Smart Control function allows you to set your desired room temperature. As the room reaches your personal setting the flame intensity and heat will gradually decrease – keeping the ambience of your Regency fire on with less heat output with the option to turn off at any time.


NO CHIMNEY? NO PROBLEM!



DIRECT VENT TECHNOLOGY allows you to add a fireplace to rooms with no existing chimney. Simply vent your fireplace through an outside wall and finish it with the patented **Regency AstroCap Flex Venting System**.

Direct Vent fireplaces are airtight systems that use outside air for combustion helping maintain indoor air quality and keeping all the warmth generated from your fireplace inside your home. Even when the fireplace is turned off, the sealed system will prevent cold air from entering the home and warm air from leaving. Direct Vent fireplaces allow versatile in *installation flexibility and increase fireplace efficiencies*.

SPREAD THE WARMTH



ZONE HEATING WITH REGENCY: Add a fireplace to your most frequently used living space and save energy by only heating rooms you use.

HEAT ADJACENT ROOMS WITH THE HEAT WAVE™ - POWER DUCT SYSTEM: Cut down on your heating costs using a Heat Wave kit. The Heat Wave system attaches onto most Regency gas fireplaces allowing you to direct heat into rooms up to 20 feet away. This kit comes complete with vent, variable speed blower (for Heat Wave system only) and vent register.

MAXIMIZING COMFORT AND EFFICIENCY

Regency Fireplaces deliver controllable heating solutions by combining the latest in radiant/convection heat technology and innovative features:

- · Adjustable flame/heat control.
- · Heat radiating ceramic glass.
- Intelligent Ignition System features
 fuel saving intermittent pilot ignition
 (IPI), 7-day continuous pilot mode
 (CPI), and 5 second Flame Failure
 Response Time (FFRT) for more
 reliable startups even in cold
 weather.
- Power's Out, Heat's On. All Regency gas fireplaces operate without electricity. Enjoy peace of mind all winter long.
- Variable speed blower to maximize efficiency. Our quiet blowers increase the efficiency of your fireplace by pushing the heat produced by your fireplace forward and distributing it throughout the room.
- Proflame GTMF Remote Controls.
 A standard feature included with all Traditional Gas Fireplaces, this user friendly programmable remote can be set to start your Regency fire at your desired room temperature and be easily adjusted with the touch of a button.


^{**} For models that have a blower.

^{***} For models that have an optional accent light.


SPECIFICATIONS

SPECIFICATION PROPANE	ONS -	INPUT (BTU)	TURN DOWN TO (BTU)	EFFICIENCY (STEADY STATE)	ENERGUIDE RATING (CANADA ONLY)
	B41XTCE	37,500	29,500	72.63%	68.35%
Bellavista	B41XTE	37,500	29,500	72.63%	68.35%
Dellavista	B36XTE	31,000	25,000	71.08%	65.90%
	B36XTCE	31,000	25,000	71.08%	65.90%
	P131E	33,000	26,500	68.40%	62.35%
	P121E	33,000	26,500	68.40%	62.35%
	P36DE	30,000	23,500	76.70%	71.56%
	P36D	30,000	15,000	71.26%	63.89%
Panorama	P36	30,000	15,500	70.55%	62.36%
	P36E	28,500	22,000	74.40%	67.44%
	P33	18,000	14,500	74.06%	67.92%
	P33E	19,500	15,500	73.82%	69.44%
	P33CE	19,500	15,500	73.82%	69.44%
Excalibur	P90E	31,500	25,500	76.86%	72.79%
Liberty	L965E	48,000	17,000	59.00%	57.70%

P131E / P121E FRONT




P131E SIDE P131E BACK P121E SIDE





	P131E	P121E
F	44-1/2"	46-1/4"
G	3"	4-3/4"
Н	36"	36"
H1	20"	20"
I	42"	42"
J	41-1/2"	43-1/2"
J1	32-5/8"	32-5/8"
K	25"	25"
K1	17-3/4"	
L	12-1/2"	12-1/2"

Note: For P121E there is a 2-3/4" vent heat shield on the vent end of the fireplace. Please allow appropriate space for center positioning.

LIBERTY L965E










	L965E
Α	5-1/4"
В	18-3/4"
С	36-13/16"
D	44-5/8"
E	43"
F	33-1/4
G	52-5/16"
Н	39-11/16"
H1	41-3/16"

EXCALIBUR P90E







	P90E
Α	31"
B1	35-1/8"
B2	42"
С	38"
D*	22-1/2"
E	45"
F	18-3/4"


* Without faceplate

SPECIFICATIONS


PANORAMA DIRECT VENT FIREPLACES

	P36DE/ P36D	P36E/ P36	P33E/P33	P33CE
Α	33-1/16"	33-1/8"	23"	23"
В	36-1/16"	36-1/16"	33"	34-9/16
С	30-1/2"	30-1/2"	29"	29-1/4"
D*	19-1/8"	15"	14-3/4"	
E	36"	36"	31-1/2"	31-3/4"
F	17-1/8"	12-3/16"	12-3/4"	16"
G				29-7/16"
Н				21-3/8"

^{*} Includes Vignette faceplate See manual for Vignette finishing trim dimensions

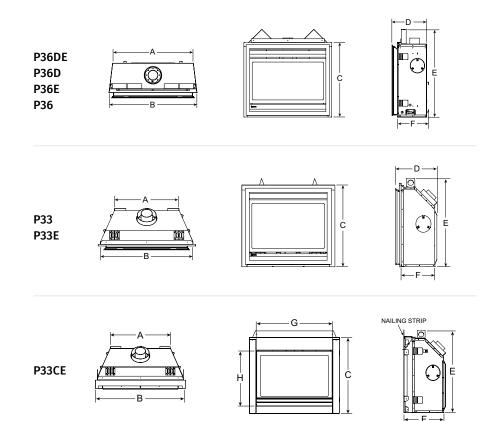



BELLAVISTA DIRECT VENT FIREPLACES

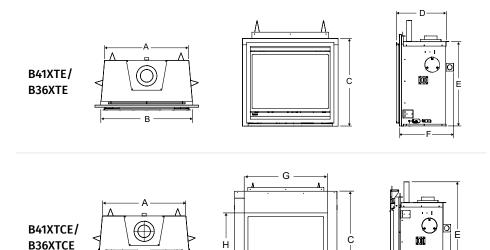

	B41XTE	B41XTCE	В36ХТЕ	вз6хтсе
Α	38-3/8"	38-3/8"	33-1/16"	33-1/16"
В	41-11/16"	46-11/16"	36"	40-5/8"
С	36-11/16"	44-1/4"	34-5/8"	38-1/16"
D*	24-9/16"		22-5/16"	
E	36-3/8"	49-1/4"	33-1/8"	41-5/16
F	22-3/8"	26-3/16"	20-7/16"	23-5/8"
G		38-7/16		32-7/8"
Н		29-1/8"		25-5/8"

SPECIFICATIONS





P36/P36E/P36D/P36DE

INSTALLATION	UNITS	A	В	С	D*	E	F	G	н	ı	J
Framing with Vignette Faceplate Stepped Finish	P36/P36E	36-1/4"	40-3/4"	12-3/4"	46"	42-7/16"	33-1/4"	36-1/4"	60"	7-1/4"	12-3/4"
	P36D/P36DE	36-1/4"	40-3/4"	17-3/8"	46"	48"	33-1/4"	36-1/4"	68"	11-1/4"	17-1/8"
Framing with Vignette	P36/P36E	38"	41-5/8"	14-3/4"	46"	43-11/16"	33-1/4"	38"	61-13/16"	9-1/4"	14-3/4"
Faceplate & Finishing Trim Finished Flush	P36D/P36DE	38"	41-5/8"	19-3/8"	46"	50-9/16"	33-1/4"	38"	71-9/16"	13-1/4"	-
Framing with Louvers and safety screen	P36/P36E	36-1/4"	36-1/4"	12-3/4"	46"	42-7/16"	33-1/4"	36-1/4"	60"	7-1/4"	12-3/4"
	P36D/P36DE	36-1/4"	37-1/4"	17-3/8"	46"	48"	33-1/4"	36-1/4"	68"	11-1/4"	17-1/8"

^{*} 'D' is minimum height to combustible materials including the minimum 2" top clearance to the horizontal vent.

P90E


INSTALLATION	UNIT	A	В	С	D	E	F	G	н	I	J
Framing and Finishing	P90E	46-1/2"	45-1/4" 46-3/8"*	21-1/2"	53-3/4"	51-1/8"	31"	46-1/2"	72-1/4"	13-11/16"	19-1/4"


^{*} If raised 1-1/8" using base standoffs.

P33/P33E


VERTICAL TERMINATION OR VERTICAL RISE WITH HORIZONTAL TERMINATION Vignette and Vignette Finishing Trim - Finished Flush


For Both Rigid & Fle






REAR TERMINATION Vignette and Vignette Finishing Trim Finished Flush









VERTICAL TERMINATION OR VERTICAL RISE WITH HORIZONTAL TERMINATION Vignette and Vignette Finishing Trim Stepped Finish or Safety Screen and Louvers


For Both Rigid & Fle




REAR TERMINATION


Vinette and Vignette Finishing Trim
Stepped Finish or Safety Screen and Louve







P121E - SEE THRU




	P121E
A*	25"
В	42-1/2"
С	46-3/4"

*Minus 2X the finishing material thickness. Finish Material thickness includes: drywall, ceramic tile, slate, etc.

NOTE: The applicance extends 2-3/4" further on the vent side. If trying to center the appliance in a room add 2-3/4" to the non vent side when framing. Do not however change dimension (C) as the opening remains the same.

P131E - PIER



	P131E
A*	25"
В	42-1/2"
С	45"

*Minus 1X the finishing material thickness. Finish Material thickness includes: drywall, ceramic tile, slate, etc.


B36XTE/B41XTE

INSTALLATION	UNITS	м	N	O (REAR VENT)	O (TOP VENT)	P (REAR VENT)	P (TOP VENT)	Q (REAR VENT)	Q (TOP VENT)
Framing with Vignette (Stepped Finish) or with flush panels and	В36ХТЕ	40-5/8"	42"	20-3/4"	20-1/2"	53" - AstroCapXL 61-1/2" - other approved caps	48-5/8"	75" - AstroCapXL 87" - other approved caps	68-3/4"
safety screen	B41XTE	47-1/4"	49-1/2"	23-1/4"	22-5/8"	60-1/4"	-	85-3/16"	-
Framing with Vignette & Vignette Trim	В36ХТЕ	42-1/4"	42"*	22-1/8"	21-7/8"	55-11/16" - AstroCapXL 64-3/16" - other approved caps	51-5/16"	78-3/4" - AstroCapXL 90-3/4" - other approved caps	72-1/2"
Finished Flush	B41XTE	48-15/15"	50-1/4"	24-7/8"	24-7/8"	63-3/8"	-	89-5/8"	-

^{*} NOTE: When using the optional Vignette finishing trim, this can be installed as a 3-sided or 4-sided finish trim. If choosing to use this as a 4-sided finish trim the framing would need to be increased by 11/16" minimum in order for this to fit. This must be to the finished floor.

B41XTCE


INSTALLATION	м	N	O (REAR VENT)	O (TOP VENT)	P	Q
Framing	47-1/4"	49-1/2"	26-1/2"	25-7/8"	65-1/4"	91-11/16"




B36XTCE

FRAMING	ВЗ6ХТСЕ
L	0"
М	41-1/4"
N	46-3/4"
O (Rear Vent)	23-7/8"
O (Top Vent)	23-7/8"
P (Rear Vent)	57-7/8" AstroCapXL 66-1/8" other approved caps
P (Top Vent)	53-1/4"
Q (Rear Vent)	81-1/2" AstroCapXL 93-1/2" other approved caps
Q (Top Vent)	75-1/4"
X	41" (Optional steel stud)

L965E






P33CE

FRAMING	P33CE WITH NON-COMBUSTIBLE BOARD ONLY	P33CE WITH TILE, STONE, BRICK, SLATE, VERONA SURROUND OR OTHER NON-COMBUSTIBLE FINISH
G	35"	35"
Н	31-3/4"	31-3/4"
I	0" (when not using a surround)	0" 3-5/16" min (w/ verona surround)
J	23-1/4" Vertical Rise 20-1/4" Rigid 16-1/2" Flex	22-3/4" Vertical Rise 19-3/4" Rigid 16" Flex
K	39-1/4"	38-15/16"
L	55-1/2"	54-1/2"



regency-fire.com





©2019 FPI Fireplace Products International Ltd. Regency®, Panorama®, Excalibur®, Bellavista®, SureFire®, Heat Wave™, Heat Release™, and AstroCap™ are registered or proprietary trademarks of FPI Fireplace Products International Ltd.

All rights reserved. Printed in Canada (07/19)

Part no. 944-227